

66/10/60
JC604 U.S. PTO

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Date: September 1, 1999

Attorney Docket No. EDWARD-37219

Sir:

Transmitted herewith for filing is the patent application of

Inventor: Timothy Edwards and Mary Edwards

For: LEASH ASSEMBLY HAVING PET REFUSE
BAG DISPENSER MECHANISM

Enclosed are:

- ☒ Seven sheets of drawing. Formal (in triplicate)
☐ An Assignment of the invention to _____
☐ A certified copy of a _____ application.
☐ An associate power of attorney.
☒ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.

The filing fee has been calculated as shown below:

FOR:	NO. FILED				NO. EXTRA
TOTAL	28	-	20	=	* 8
INDEP.	3	-	3	=	* 0
BASIC FEE					
MULTIPLE DEPENDENT CLAIM PRESENTED					
ASSIGNMENT					
Total Additional Fee					

SMALL ENTITY		
RATE		FEE
9	=	\$ 72.00
39	=	\$ -0-
380	=	\$ 380.00
130	=	\$ -0-
40	=	\$ -0-
		\$ 452.00

OTHER THAN A SMALL ENTITY		
RATE		FEE
18	=	\$
78	=	\$
760	=	\$
260	=	\$
40	=	\$
		\$


* Enter "0" in the case of a negative number.

☒ A check in the amount of \$ 452.00 to cover the filing fee is enclosed

KELLY BAUERSFELD LOWRY & KELLEY, LLP
6320 Canoga Avenue, Suite 1650
Woodland Hills, California 91367
(818) 347-7900

SWK:cw

Respectfully submitted,

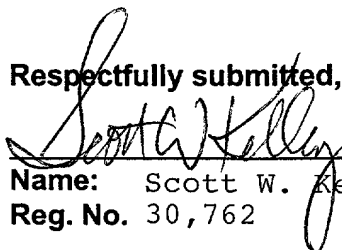
Name: Scott W. Kelley
Reg. No. 30,762

Applicant or Patentee: Timothy Edwards and Mary Edwards

Serial or Patent No: Concurrently

Filed or Issued: Concurrently

For: LEASH ASSEMBLY HAVING PET REFUSE BAG DISPENSER MECHANISM

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL
ENTITY STATUS (37 CFR 1.9 (f) and 1.27 (b))
INDEPENDENT INVENTOR

As the below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled: LEASH ASSEMBLY HAVING PET REFUSE BAG DISPENSER MECHANISM described in

☒ the specification filed herewith
☐ application Serial No. , filed
☐ Patent No. , issued

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed or licensed or am under or may be under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ no such person, concern, or organization
☐ persons, concerns or organizations listed below*

* Note: Separate verified statements are required for each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

FULL NAME:

ADDRESS:

- ☐ Individual ☐ Small Business Concern
☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name of Inventor: Timothy Edwards

Signature of Inventor: Timothy Edwards

Date: 8/26, 1999

Applicant or Patentee: Timothy Edwards and Mary Edwards

Serial or Patent No: Concurrently

Filed or Issued: Concurrently

For: LEASH ASSEMBLY HAVING PET REFUSE BAG DISPENSER MECHANISM

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL
ENTITY STATUS (37 CFR 1.9 (f) and 1.27 (b))
INDEPENDENT INVENTOR

As the below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled: LEASH ASSEMBLY HAVING PET REFUSE BAG DISPENSER MECHANISM described in

☒ the specification filed herewith

☐ application Serial No. , filed

☐ Patent No. , issued

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed or licensed or am under or may be under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ no such person, concern, or organization
☐ persons, concerns or organizations listed below*

* Note: Separate verified statements are required for each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

FULL NAME:

ADDRESS:

- ☐ Individual ☐ Small Business Concern
☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name of Inventor: Mary Edwards

Signature of Inventor: Mary Edwards

Date: 8/26, 1999

(Signature of person mailing paper or fee)

Woodland Hills, CA 91367

LEASH ASSEMBLY HAVING PET REFUSE
BAG DISPENSER MECHANISM

RELATED APPLICATION

This application claims priority from U.S. provisional patent application Serial No. 60/100,484 filed September 16, 1998.

BACKGROUND OF THE INVENTION

5 This invention relates to leash assemblies and devices for collecting animal litter. More specifically, the present invention relates to a pet refuse bag dispenser which is incorporated into a leash, that may be advantageously utilized to conveniently access a plastic bag into which animal litter may be placed when desired.

10 The rapid increase of urban population coupled with the increasing popularity of dogs and other pets has created a serious sanitary problem in connection with the disposal of animal litter, and particular canine litter. Because many animal pet owners have permitted their animals to deposit solid excrement on both private and public property, a number of communities have enacted ordinances requiring pet owners, under penalty of fine, to retrieve and dispose of litter created by their pets.

15 It has been found that the willingness of pet owners to retrieve and properly dispose of animal litter is related to the ease, convenience and economy with which the litter may be handled in a clean and sanitary manner. While a number of devices have been proposed for the purpose of disposing of animal litter, they have suffered from various shortcomings. Some devices
20 are not completely disposable and, therefore, require some degree of cleanup. Other types of devices, both of the disposable and reusable varieties, are awkward and/or conspicuous to carry. Moreover, some prior animal litter collection devices are too expensive for everyday use.

One commonly accepted method for collecting and storing animal litter until a proper disposal site can be found involves the use of a disposable plastic bag. Some pet owners will simply place a plastic bag, such as a plastic grocery bag, in a clothing pocket for retrieval when needed. This method of collecting animal litter presupposes, however, that the pet owner will always have access to and remember to grab a plastic bag prior to walking the pet. There have been proposals to provide devices which would store plastic bags within a container that may be worn by the owner or the pet. Each of these prior devices, however, suffers several disadvantages which the present invention is intended to overcome.

The retractable leash has been gaining popularity for the last twenty years and has taken its place as a permanent pet product. Some have recognized the desirability of providing an easy way to carry pet waste clean-up bags when going for a walk utilizing such a retractable leash. An example is found in U.S. Patent No. 5,540,469. In that reference, a retractable leash is placed into an animal waste collecting device which incorporates its own handle, bag holder and flashlight. It is believed, however, that such an assembly involves apparatus and associated costs which are undesirable.

Accordingly, there is a need for a novel pet refuse bag dispenser which is incorporated into or attached onto a retractable leash device to provide access to a roll of plastic bags when needed. The present invention fulfills this need and provides other related advantages.

SUMMARY OF THE INVENTION

The present invention resides in a leash assembly comprising the combination of a pet refuse bag dispenser with a retractable leash. More particularly, the leash assembly is comprised of a housing defining a handle for the leash assembly and an interior compartment from which a leash extends. A generally tubular bag dispenser underlies the handle and includes a lid which permits access to an inner cavity in which a plurality of bags are

disposed. The lid typically comprises a removable cap which is threaded over an open end of the bag dispenser.

The bag dispenser is either integrally formed with the leash handle or removably connected to a base of the handle. In leash assemblies utilizing the removable bag dispenser, a clamp is formed with or otherwise attached to the handle. The clamp has an open faced channel and opposing side grooves which slidingly accept a mating rail formed on a top portion of the bag dispenser. The bag dispenser is connected to the handle by sliding the rail into the grooves of the open faced channel until the rail is completely inserted and a frictional fit is formed. Likewise, the bag dispenser is removed from the leash handle by sliding the bag dispenser out of the side grooves.

In one embodiment, the plurality of plastic bags are rolled and detachably connected end to end. Means for centrally and rotationally retaining the roll of plastic bags within the bag dispenser are provided. Such means include a tubular axle about which the roll of plastic bags is wound, opposing axle guides about which the tubular axle and thus the roll of plastic bags rotate. One axle guide is formed with the lid, and the opposing axle guide is formed within an opposite end of the bag dispenser. A window is formed in a side wall of the bag dispenser so that individual plastic bags may be removed from the bag dispenser.

In another embodiment, the plurality of plastic bags are folded and contained within a cartridge which is frictionally fitted within the bag dispenser through the open end. A window is provided on a side wall of the cartridge which substantially aligns with the window of the bag dispenser so that the plastic bags may be selectively removed from the aligned windows.

In yet another embodiment, a cartridge containing a plurality of folded plastic bags is frictionally fitted within the bag dispenser through the open end of the bag dispenser. The cartridge has a tear away tab at its base, allowing the individual removal of the plastic bags from the cartridge through the open end of the bag dispenser.

In yet a further embodiment, the lid includes an aperture and a flexible membrane having slits substantially aligned with the aperture for the

removal of the plastic bags from the bag dispenser through the slits in the membrane of the lid. The plastic bags are preferably rolled and detachably connected end to end.

5 Other features and advantages of the present invention will become apparent from the following more detailed description, taken in conjunction with the accompanying drawings which illustrate, by way of example, the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings illustrate the invention. In such drawings:

10 FIGURE 1 is a perspective view of one embodiment of a pet refuse bag dispenser attached to a retractable leash device which is the subject of U.S. patent application serial No. 09/059,730, illustrating the manner in which a plastic bag is withdrawn from the dispenser through an aperture in a housing thereof;

15 FIGURE 2 is an enlarged top and side perspective view of the pet refuse bag dispenser illustrated in FIG. 1;

FIGURE 3 is a horizontal section taken generally along the line 3-3 of FIG. 2, illustrating the positioning of a roll of plastic bags within a cylindrical base;

20 FIGURE 4 is a side elevational view of the dispenser of FIGS. 1-3;
FIGURE 5 is an elevational sectional view taken generally along the line 5-5 of FIG. 4;

25 FIGURE 6 is a perspective view of a second form of the pet refuse bag dispenser and which also is the subject of U.S. patent application serial No. 09/059,730, wherein the housing comprises a blister pack affixed to a backing so as to capture the roll of plastic bags therebetween;

FIGURE 7 is a sectional view taken generally along the line 7-7 of FIG. 6;

FIGURE 8 is a perspective view of a leash assembly embodying the present invention, wherein the leash assembly comprises the combination of a pet refuse bag dispenser with a retractable leash;

5 FIGURE 9 is an enlarged elevational and partially sectional view of the leash assembly of FIG. 8;

FIGURE 10 is a sectional view taken generally along the line 10-10 of FIG. 9;

10 FIGURE 11 is an elevational view of a leash assembly embodying the present invention, wherein the pet refuse bag dispenser is removable from the handle of the retractable leash;

FIGURE 12 is an enlarged fragmented sectional view taken generally along the line 12-12 of FIG. 11, wherein the plastic bags are rolled within the pet refuse bag dispenser;

15 FIGURE 13 is an elevational view of a leash assembly embodying the present invention having a cartridge insertable into the bag dispenser and which contains folded plastic bags removable from a side window;

FIGURE 14 is an end view of the leash assembly of FIGS. 11-13, wherein a lid covers an open end of the bag dispenser;

20 FIGURE 15 is a sectional view similar to FIG. 13, illustrating yet another embodiment wherein the lid is removed and the plastic bags are removed from the cartridge from the end of the pet refuse bag dispenser;

FIGURE 16 is an end view of the cartridge of FIG. 15, wherein a tear-away tab portion allows removal of the plastic bags from within the cartridge;

25 FIGURE 17 is an elevational view of another leash assembly embodying the present invention, wherein the plastic bags are removable through the lid of the pet refuse bag dispenser;

FIGURE 18 is an enlarged fragmented sectional view taken generally along line 18-18 of FIG. 17; and

30 FIGURE 19 is an end view taken generally along line 19-19 of FIG. 17, wherein the lid includes slits formed through a flexible membrane for the removal of the plastic bags therefrom.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As shown in FIGS. 8-19 for purposes of illustration, the present invention is concerned with a leash assembly 60 having a pet refuse bag dispenser mechanism associated therewith. By way of background information, related pet refuse bag dispensers, generally illustrated in FIGS. 1-5 by the reference number 10 and in FIGS. 6 and 7 by the reference number 12 are illustrated and described herein. The pet refuse bag dispensers 10 and 12 each include a housing 14, 14' which defines an inner cavity 16, 16' for holding therein a roll 18 of a plurality of plastic bags 20 which are connected end-to-end. The roll 18 of plastic bags 20 is disposed within the inner cavity 16, 16' of the housing 14, 14' such that the bags may be individually removed therefrom through a housing aperture 22, 22'.

The pet refuse bag dispensers 10 and 12 are intended to be utilized in connection with a collar or a leash device 24 commonly utilized when walking one's pet. The exemplary leash device 24 illustrated in FIG. 1 comprises a leash housing 26 from which a retractable leash 28 extends. A handle 30 is formed with the leash housing 26, and a ring or bead tie 32 is utilized to connect the dispensers 10 and 12 conveniently to the leash device 24. In this regard, the pet refuse bag dispenser 10 illustrated in FIG. 1 includes an upper eye loop 34 integrally formed with the housing 14 through which the ring or bead tie 32 is placed to securely affix the dispenser 10 to the leash device 24. Alternatively, with regard to the pet refuse bag dispenser 12 of FIG. 6, an aperture 36 is provided through which the bead tie 32 may be placed to similarly affix the dispenser 12 to the leash device 24 or collar.

Referring now specifically to FIGS. 2-5, the pet refuse bag dispenser 10 is generally cylindrical in shape having the aperture 22 provided in a side wall of the housing 14, with the eye loop 34 extending from an upper end of the housing 14 and a hook 38 extending downwardly from a lower end of the housing 14. The hook is provided to permit the user to place a knot tied in one of the plastic bags 20 after animal litter has been collected on one side of the hook 38 such that the weight of the litter within the bag will hold the plastic bag

in place. This advantageously permits the user place the bag onto the dispenser 10 until a proper disposal site is reached. Of course, other forms of retainers, including clips and the like may be substituted for the hook 38.

5 The housing 14 comprises a cylindrical base 40 which has an open upper end through which the roll 18 of plastic bags 20 may be inserted into the inner cavity 16, and a removable lid 42 for enclosing the upper open end of the cylindrical base 40. As shown, the lid 42 snap-fits onto the open upper end of the cylindrical base 40.

10 The bag dispenser 10 further includes means for centrally and rotationally retaining the roll 18 of plastic bags 20 within the housing 14. This includes a tubular axle 44 about which the roll of plastic bags is wound, and means for positioning the axle centrally within the inner cavity 16 of the housing 14 such that the tubular axle, and thus the roll of plastic bags, may rotate therein. More specifically, the axle positioning means comprises an
15 upper axle guide 46 which is integrally formed with the lid 42 and extends downwardly therefrom into the inner cavity 16, and a lower axle guide 48 that is integrally formed with the cylindrical base 40 and extends upwardly into the inner cavity 16. The tubular axle 44 is configured so that the ends thereof fit over the upper and lower axle guides 46 and 48 to be securely yet rotatably
20 retained centrally within the inner cavity 16.

In use, fifteen or so plastic bags 20 are wound about the tubular axle 44 to form the roll 18. The lid 42 may be removed from the cylindrical base 40 to place the roll 18 within the inner cavity 16. The lower end of the tubular axle 44 is fitted over the lower axle guide 48. When the lid 42 is replaced over the
25 open upper end of the cylindrical base 40 and snap-fit into place, the upper guide axle guide 46 is disposed within the upper end of the tubular axle 44. The end bag 20 of the roll 18 may then be accessed through the housing aperture 22 and withdrawn from the housing 14 as desired. The entire roll 18 of plastic bags 20 disposed on the tubular axle 44 will rotate within the housing
30 14 as the bags 20 are withdrawn therefrom. The bags are preferably releasably attached to one another such that one bag may be easily separated from another after being withdrawn from the dispenser 10, yet the bags are

sufficiently attached to one another to prevent such separation as they are being withdrawn from the dispenser.

Referring now to FIGS. 6 and 7, the housing 14', comprises a blister pack 50 which is affixed to a backing 52 so as to capture the roll 18 of plastic bags 20 therebetween. The blister pack 50 and the backing cooperatively define therebetween the inner cavity 16', and the housing aperture 22' is provided in a front face of the blister pack 50. A cover 54 may be placed over the aperture 22' in the blister pack 50 to completely enclose the roll 18 of plastic bags 20 until it is desired to remove a plastic bag 20 for use.

As was the case in the prior embodiment, means are provided for centrally and rotationally retaining the roll 18 of plastic bags 20 within the housing 14'. Again, a tubular axle 56 is provided about which the roll of plastic bags is wound. At opposite ends of the tubular axle 56 are provided circular flanges 58. The circular flanges 58 provide means for positioning the axle 56 centrally within the inner cavity 16' of the housing 14' such that the axle 56, and thus the roll 18 of plastic bags 20, may rotate therein.

In operation, the pet refuse bag dispenser 12 operates in much the same manner as the dispenser 10 of FIGS. 1-5. The particular manner in which the dispenser 12 has been packaged, however, permits a single roll 18 of plastic bags 20 to be packaged for use in a housing 14 which is disposable once the last plastic bag 20 is utilized.

In accordance with the present invention, and with reference to FIGS. 8-10, the leash assembly 60 comprises the combination of a pet refuse bag dispenser 62 with a retractable leash device 64. The dispenser 62 is identical to the roll 18 of plastic bags disposed within the housing 14 described above. More particularly, the dispenser 62 includes a tubular axle 44 about which the roll of plastic bags is wound. Typically, fifteen or so plastic bags 20 are wound about the tubular axle 44 to form the roll 18.

The leash device 64 is similar to the leash device 24 illustrated in FIG. 1 and includes a leash housing 26 from which a retractable leash 28 extends. A handle 30 is formed with the leash housing 26. Notably, the leash device 64 differs from the leash device 24 described above in that the housing

26 is slightly larger at the bottom of the handle area in order to house the dispenser 62. In this regard, the leash housing 26 defines an inner cavity 66 and an aperture 68 which permits access to the inner cavity 66.

5 Within the cavity 66 there is provided an axle guide 70 that is insertable into one end of the tubular axle 44. A spring-loaded pin 72 is also provided within the inner cavity 66 and supported by the lid 74 opposite the axle guide 70, to engage an opposite end of the tubular axle 44 in the manner illustrated. This spring-loaded system keeps the dispenser 62 in place and allows the bag roll to spin when removing a bag 20 through a window 76
10 formed in a side wall of the pet refuse bag dispenser 62. The particular construction of the dispenser 62 facilitates easy removal of the bags 20 therefrom by maintaining the axis of rotation of the roll 18 in a central position within the inner cavity 66.

15 The lid 74 comprises a threaded removable cap over the aperture 68 which provides access to the inner cavity 66 of the bag dispenser 62. A cord 78 or the like is interconnected between the lid 74 and the handle 30 so that the lid 74 does not fall to the ground when it is removed to install replacement bags 20.

20 In other embodiments of the present invention, instead of being formed with the handle 30 as in the embodiment of FIGS. 8-10, the pet refuse bag dispenser 62 can be removably attached to the base of the handle 30. For example, the embodiment of FIGS. 11 and 12 shows a clamp 80 having an open faced channel 82 and grooves 84 opposing one another on lateral sides of the channel which is attached to or formed with the base of the handle
25 30. A rail 86 configured to mate with the open faced channel 82 and grooves 84 is formed or otherwise attached to the top portion of the pet refuse bag dispenser 62. More particularly, the rail comprises a segment 88 extending upwardly from the top of the pet refuse bag dispenser 62 and having flanges 90 extending outwardly at opposing lateral sides of the segment 88. The flanges 90 are configured to slide into the grooves 84 of the clamp 80,
30 resulting in the upper face of the segment 88 lying flush within the open faced channel 82 of the clamp 80. The rail 86 is frictionally fit within the clamp 80

and is slidable into or slidable out of the clamp 80 so as to attach or remove the pet refuse dispenser 62 from the retractable leash handle 30. Although various drawings illustrate either a removable pet refuse bag dispenser or a pet refuse bag dispenser formed integrally with the handle, the reader should appreciate that these may be used interchangeably in the several illustrated embodiments of the present invention.

Referring to FIG. 13, a cartridge 92 may be sized such that it is insertable through the open end aperture 68 of the pet refuse bag dispenser 62 so that the corners of the cartridge 92 frictionally fit within the inner cavity 66. The cartridge 92 is provided with a side-wall window 94 which is substantially aligned with the window 76 of the pet refuse bag dispenser 62 when the cartridge 92 is fully inserted into the inner cavity 66. Folded bags 20 are selectively and individually removable through the aligned windows 76 and 94.

With reference to FIGS. 14-16, a cartridge 96 having a tear-away tab portion 98 formed by small perforations at one end near the base of the cartridge 96 is also insertable into the inner cavity 66 of the pet refuse bag dispenser 62. The tear-away portion 98 is removed by pinching the tabbed portion 98 and twisting and pulling it away, revealing the bottom-most bag 20 which is accessible for removal. Removal of the bottom-most bag 20 causes the stack of folded bags 20 to shift downward until all of the bags 20 have been removed from the cartridge 96. The cartridge 96 is then disposed of and a new cartridge inserted in its place. During periods when the pet refuse bag dispenser 62 is not being used, the lid 74 can be secured to the open end of the pet refuse bag dispenser 62 to prevent the accidental loss of bags 20 or the cartridge 96.

Referring now to FIGS. 17-19, another way of removing the plastic bags 20 from the pet refuse bag dispenser 62 is illustrated. The lid 74 includes a flexible membrane 100 which has an aperture therethrough, typically in the form of a cross-slit 102. The plastic bags 20 are detachably connected to one another and rolled so that once the first bag is removed from the cross-slit 102, the next bag is partially exposed through the lid 74 for easy removal. The

flexible membrane 100 is preferably resilient so that the cross-slit 102 somewhat closes upon the partially exposed bag to hold it in place. In this manner, the next bag of the roll 18 is always partially exposed through the lid 74 until the roll of bags 18 is exhausted. Once exhausted, a new roll of bags 18 is inserted into the inner cavity 66 of the pet refuse bag dispenser 62.

It is contemplated that the retractable leash assemblies 60 of the present invention can also be configured to incorporate into or otherwise attach a radio, a walkie talkie or a cell phone into the housing 26 of the leash 24. With these configurations a user can listen to music or talk with someone while walking his or her pet. A flashlight can also be incorporated into the leash housing 24, providing light while walking the pet during the dark.

From the foregoing it will be appreciated that the leash assemblies 60 of the present invention provide a great convenience by incorporating a pet refuse bag dispenser with a very popular type of leash to provide convenient and ready access to bags 20 when needed. The leash assemblies 60 can be manufactured economically and the features thereof may be embodied into most types of prior leash devices 24.

Although several embodiments of the invention have been described in detail for purposes of illustration, various modifications of each may be made without departing from the spirit and scope of the invention. Accordingly, the invention is not to be limited, except as by the following claims.

WHAT IS CLAIMED IS:

1. A leash assembly, comprising:
 - a housing which defines a handle for the leash assembly and an interior compartment;
 - a leash extendable from and retractable into the interior compartment;
 - a generally tubular pet refuse bag dispenser underlying the handle, the bag dispenser including a lid which permits access to an inner cavity of the bag dispenser; and
 - a plurality of bags disposed within the bag dispenser.
2. The leash assembly of claim 1, wherein the lid comprises a removable cap over an open end of the bag dispenser.
3. The leash assembly of claim 1, wherein the plurality of bags are rolled and detachably connected end to end.
4. The leash assembly of claim 3, including means for centrally and rotationally retaining the roll of plastic bags within the bag dispenser.
5. The leash assembly of claim 4, wherein the means for centrally and rotationally retaining includes a tubular axle about which the roll of plastic bags is wound, and axle guides including an axle guide integrally formed with the lid, and an opposing axle guide formed within an opposite end of the bag dispenser such that the tubular axle, and thus the roll of plastic bags, may rotate within the bag dispenser.
6. The leash assembly of claim 1, including a window formed through a side wall of the bag dispenser for the removal of the plastic bags therefrom.

7. The leash assembly of claim 6, wherein the plurality of plastic bags are folded and contained within a cartridge having a window formed in a side thereof and frictionally fitted within the bag dispenser such that the windows of the bag dispenser and the cartridge substantially align.

8. The leash assembly of claim 1, wherein the lid includes an aperture and a flexible membrane having slits substantially aligned with the aperture for the removal of the plastic bags from the bag dispenser through the lid.

9. The leash assembly of claim 8, wherein the plurality of plastic bags are rolled and detachably connected end to end.

10. The leash assembly of claim 2, wherein the plurality of plastic bags are folded and contained within a cartridge which is frictionally fitted within the inner cavity of the bag dispenser.

11. The leash assembly of claim 10, wherein the cartridge includes a tear away tab for the removal of the plastic bags from the open end of the bag dispenser.

12. The leash assembly of claim 1, wherein the bag dispenser is formed integrally with the leash handle.

13. The leash assembly of claim 1, wherein the bag dispenser is removably connected to the leash handle.

14. The leash assembly of claim 13, including a clamp having an open faced channel and opposing side grooves which slidingly accept a mating rail formed on a top portion of the bag dispenser, such that the bag dispenser can be connected to the base of the leash handle by sliding the rail into the clamp.

15. A leash assembly, comprising:

a housing which defines a handle for the leash assembly and an interior compartment;

5 a leash extendable from and retractable into the interior compartment;

a generally tubular pet refuse bag dispenser formed integrally with the handle such that the handle forms an inner cavity of the bag dispenser;

a lid including a removable cap over an open end of the bag dispenser which permits access to the inner cavity of the bag dispenser; and

10 a plurality of bags disposed within the bag dispenser.

16. The leash assembly of claim 15, wherein the plurality of bags are rolled and detachably connected end to end.

17. The leash assembly of claim 16, including means for centrally and rotationally retaining the roll of plastic bags within the bag dispenser, the retaining means including a tubular axle about which the roll of plastic bags is wound, and axle guides including an axle guide integrally formed with the lid, and an opposing axle guide formed within an opposite end of the bag dispenser such that the tubular axle, and thus the roll of plastic bags, may rotate within the bag dispenser.

18. The leash assembly of claim 17, including a window formed through a side wall of the bag dispenser for the removal of the plastic bags therethrough.

19. A leash assembly, comprising:

a housing which defines a handle for the leash assembly and an interior compartment;

5 a leash extendable from and retractable into the interior compartment;

a generally tubular pet refuse bag dispenser removably connected to the handle;

a lid including a removable cap over an open end of the bag dispenser which permits access to an inner cavity of the bag dispenser; and

10 a plurality of bags disposed within the bag dispenser.

20. The leash assembly of claim 19, including a clamp having an open faced channel and opposing side grooves which slidably accept a mating rail formed on a top portion of the bag dispenser, such that the bag dispenser can be connected to the base of the leash handle by sliding the rail into the clamp.

5

21. The leash assembly of claim 20, wherein the plurality of bags are rolled and detachably connected end to end.

22. The leash assembly of claim 21, including means for centrally and rotationally retaining the roll of plastic bags within the bag dispenser, the retaining means including a tubular axle about which the roll of plastic bags is wound, and axle guides including an axle guide integrally formed with the lid, and an opposing axle guide formed within an opposite end of the bag dispenser such that the tubular axle, and thus the roll of plastic bags, may rotate within the bag dispenser.

5

23. The leash assembly of claim 21, including a window formed through a side wall of the bag dispenser for the removal of the plastic bags therefrom.

24. The leash assembly of claim 19, wherein the lid includes an aperture and a flexible membrane having slits substantially aligned with the aperture for the removal of plastic bags from the bag dispenser through the lid.

25. The leash assembly of claim 24, wherein the plurality of plastic bags are rolled and detachably connected end to end.

26. The leash assembly of claim 19, wherein the plurality of plastic bags are folded and contained within a cartridge which is frictionally fitted within the inner cavity of the bag dispenser.

27. The leash assembly of claim 26, wherein the cartridge includes a tear away tab for the removal of the plastic bags from the open end of the bag dispenser.

28. The leash assembly of claim 23, wherein the plurality of plastic bags are folded and contained within a cartridge having a window formed in a side thereof and frictionally fitted within the bag dispenser such that the windows of the bag dispenser and the cartridge substantially align.

65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205 210 215 220 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 480 485 490 495 500 505 510 515 520 525 530 535 540 545 550 555 560 565 570 575 580 585 590 595 600 605 610 615 620 625 630 635 640 645 650 655 660 665 670 675 680 685 690 695 700 705 710 715 720 725 730 735 740 745 750 755 760 765 770 775 780 785 790 795 800 805 810 815 820 825 830 835 840 845 850 855 860 865 870 875 880 885 890 895 900 905 910 915 920 925 930 935 940 945 950 955 960 965 970 975 980 985 990 995

5

10

A leash assembly includes a retractable leash in combination with a pet refuse bag dispenser. The bag dispenser underlies a handle of the leash and includes a lid for permitting access to an inner cavity in which a plurality of bags are disposed. The bag dispenser is either integrally formed with the leash handle, or removably connected to a base of the handle. The plastic bags are disposed within the inner cavity such that the bags may be individually removed. The plastic bags may be selectively removed through a window provided in a side wall of the bag dispenser. The plastic bags may also be removed through a lid having slits through a flexible membrane. Alternatively, a cartridge containing the folded bags is inserted into the bag dispenser and either includes a window which substantially aligns with the bag dispenser window for access to the plastic bags, or a tear away tab for the removal of the bags through an open end of the bag dispenser.

[illegible]

Sheets of Drawings: SEVEN (in triplicate)

FIG. 1

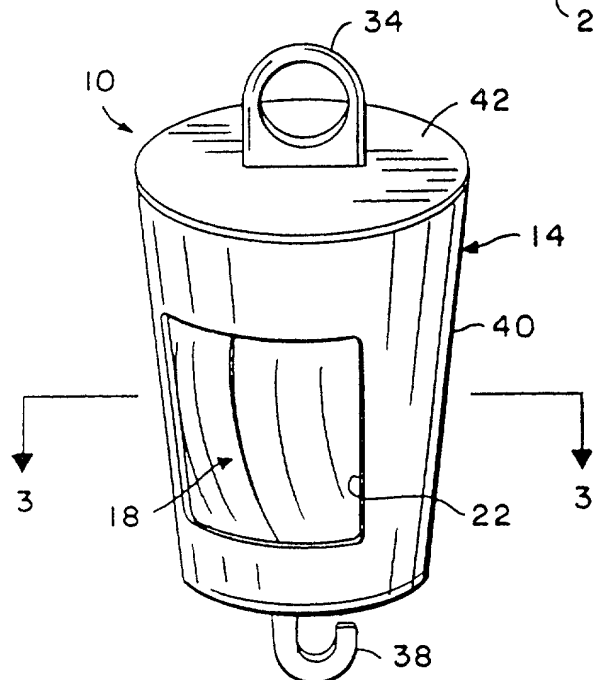


FIG. 2

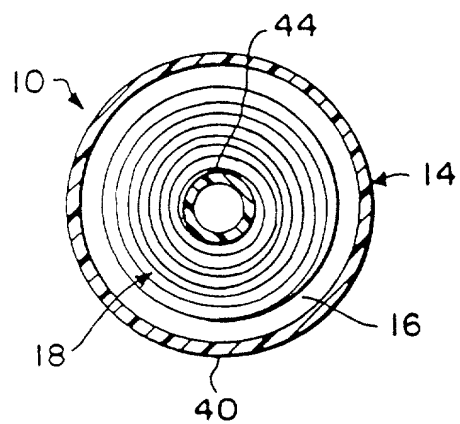


FIG. 3

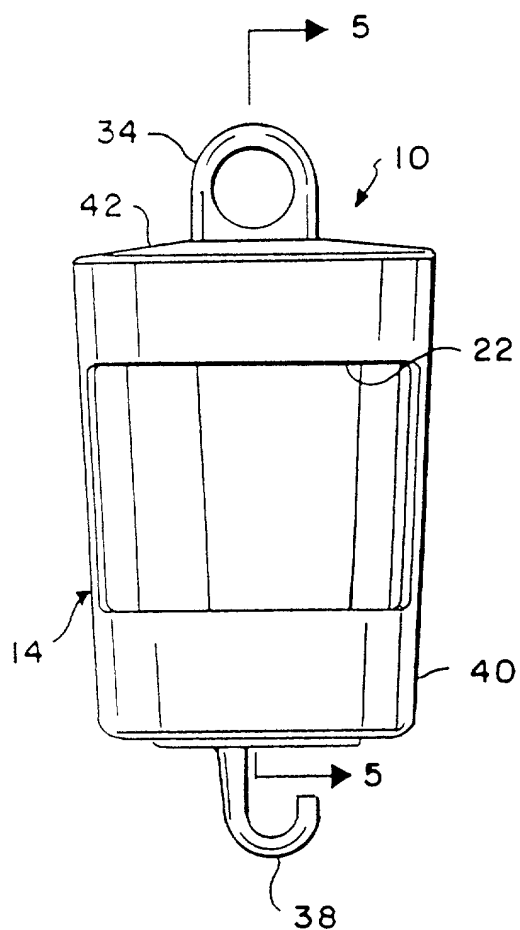


FIG. 4

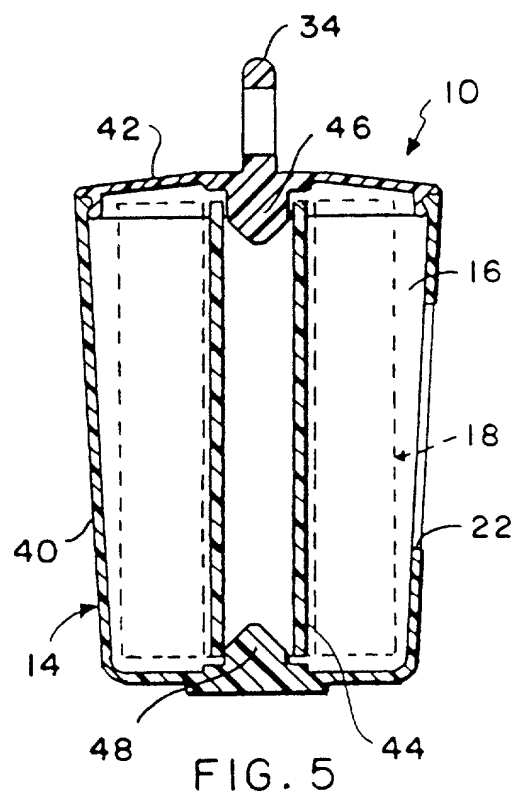
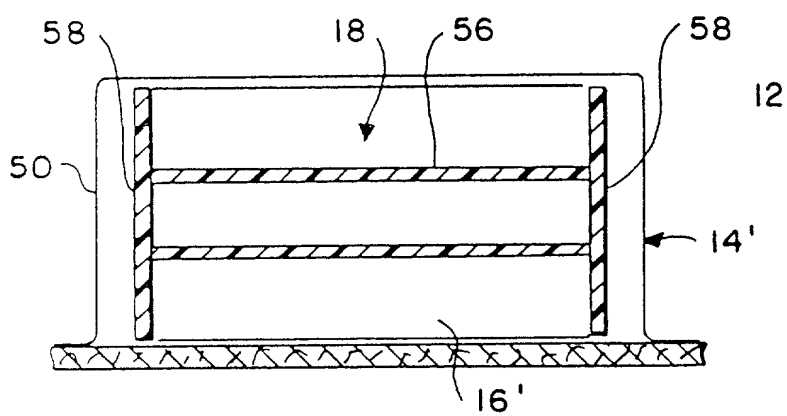
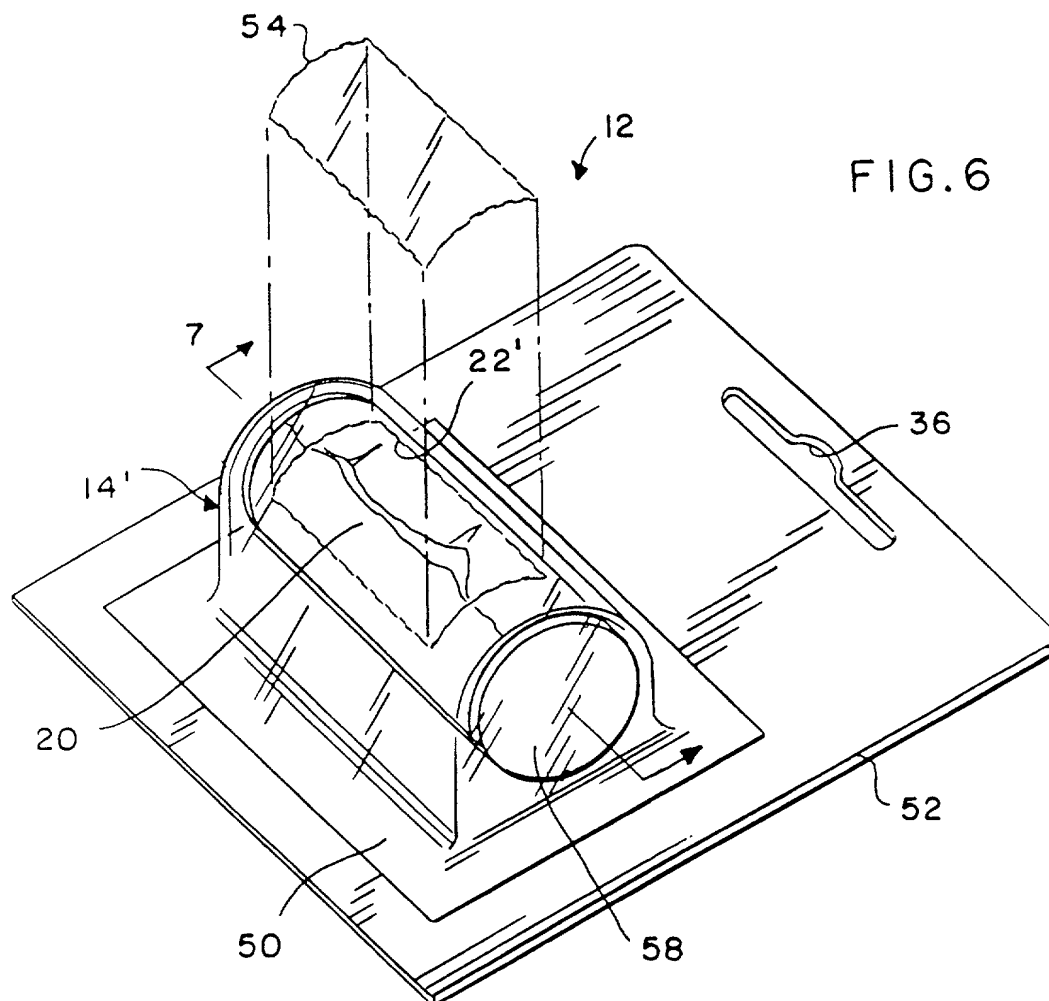
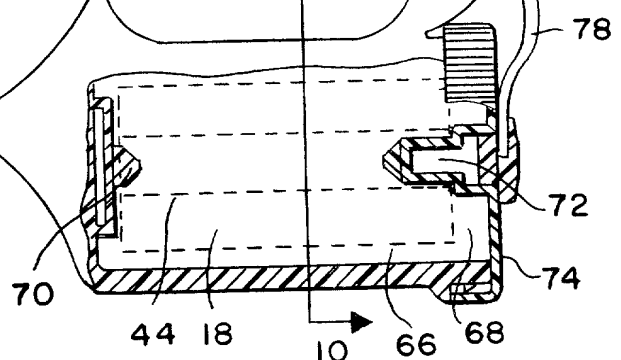
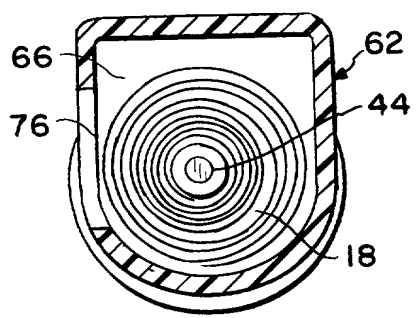
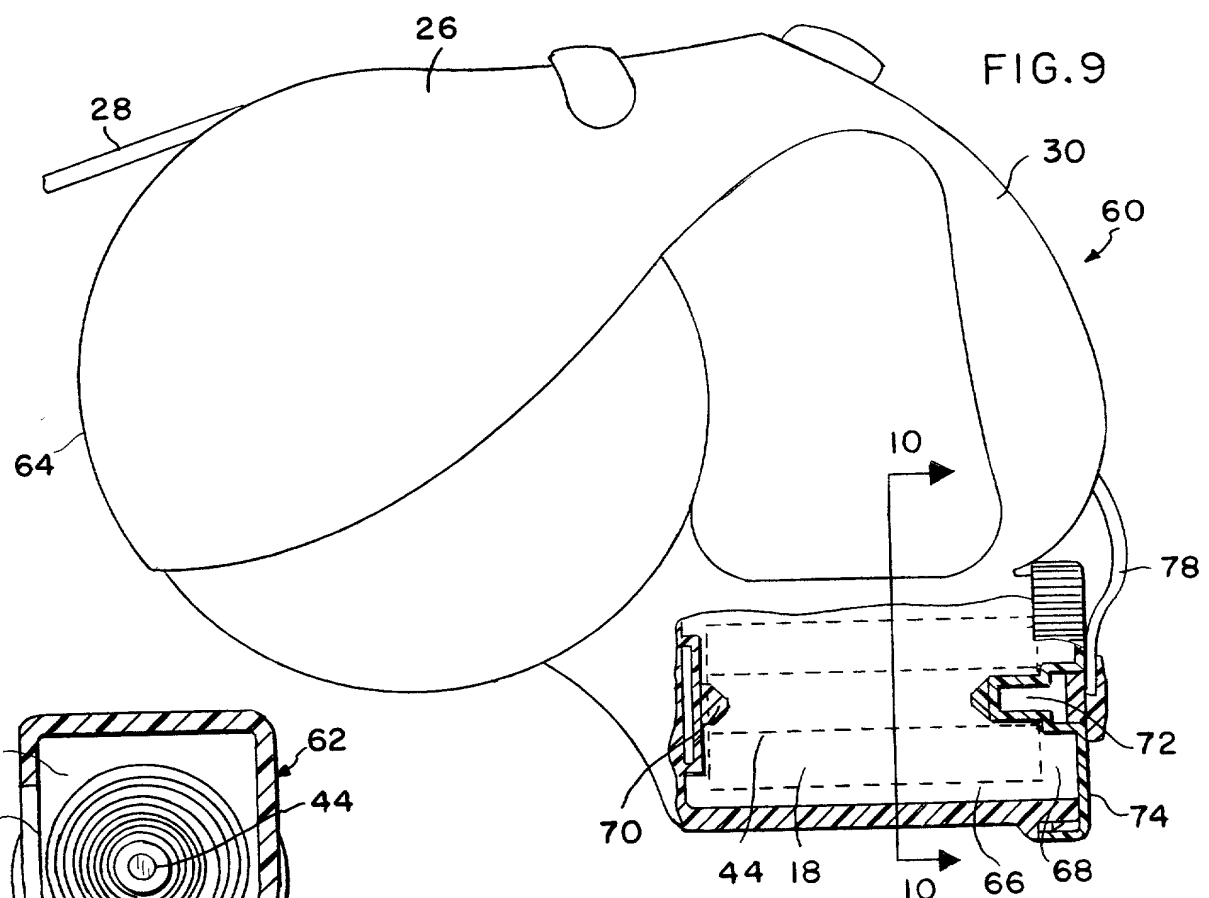
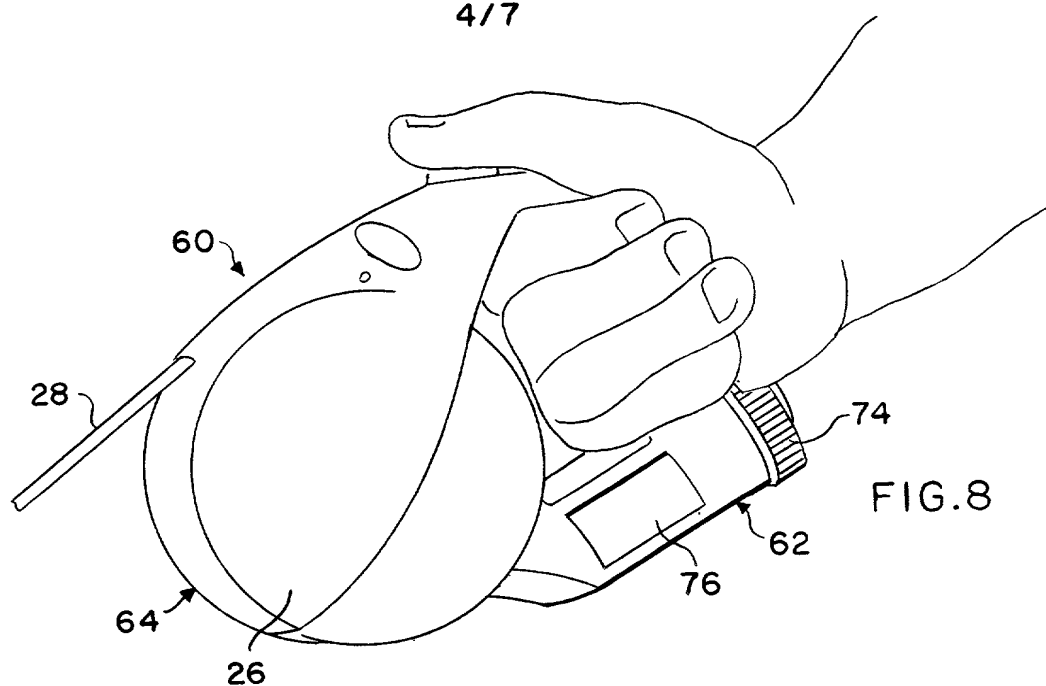


FIG. 5





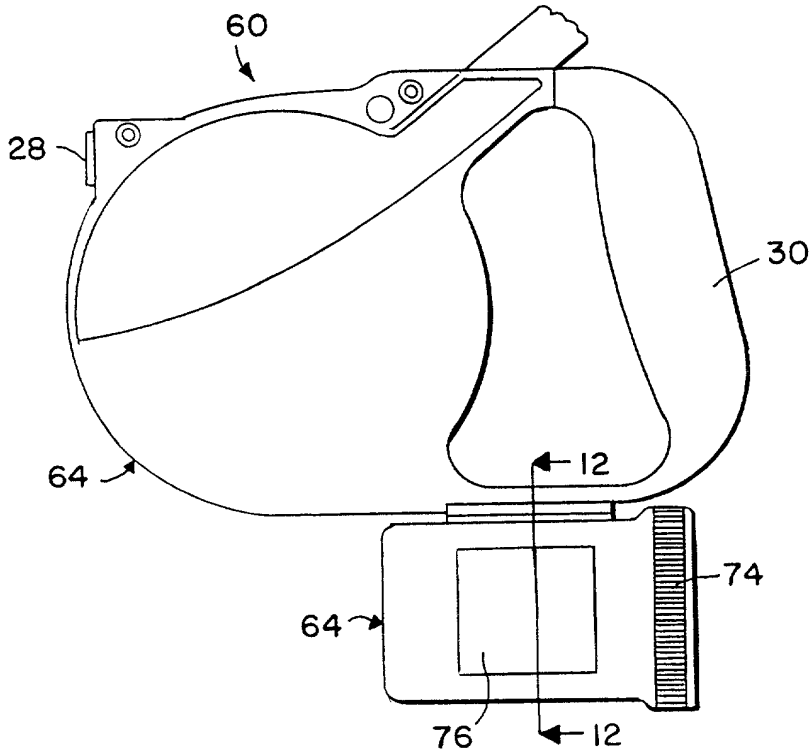


FIG. 11

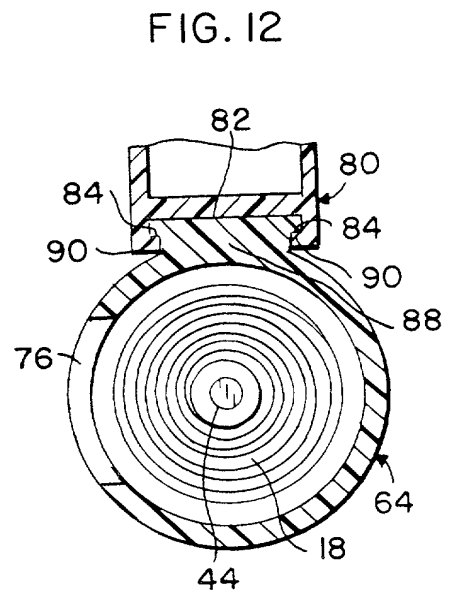


FIG. 12

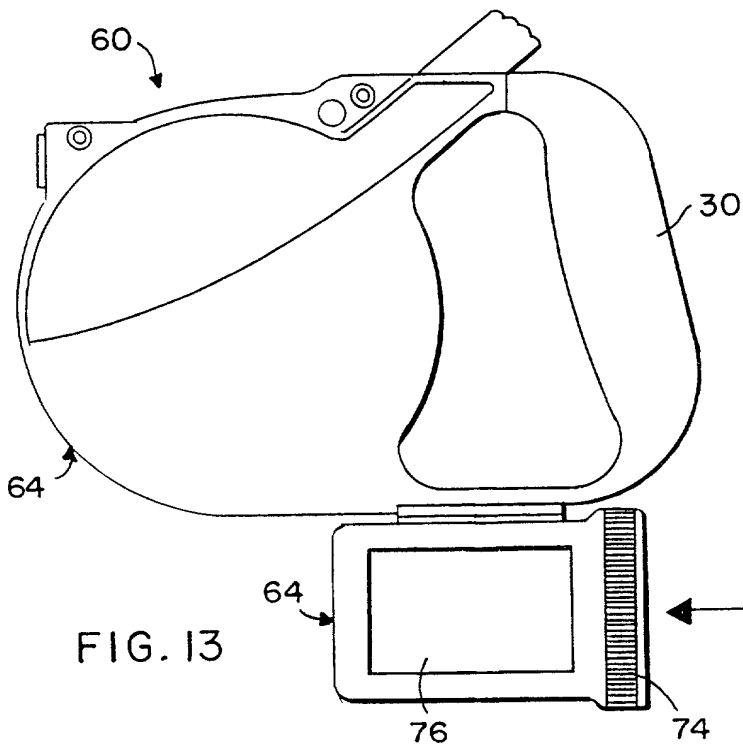
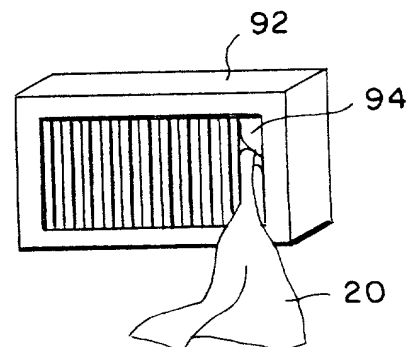


FIG. 13



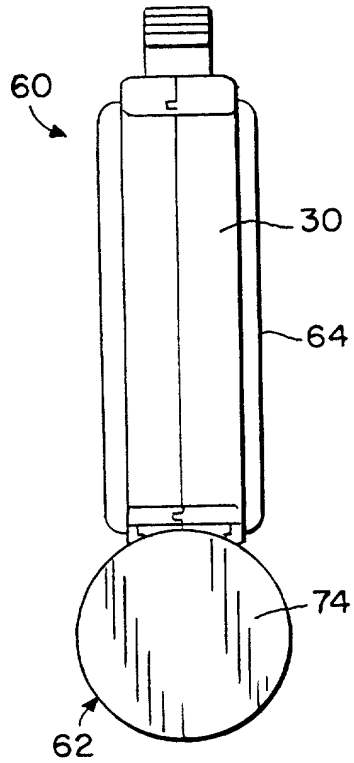


FIG. 14

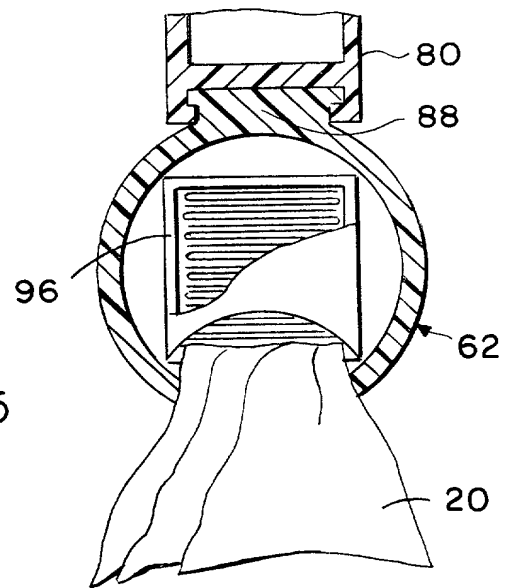


FIG. 15




FIG. 16

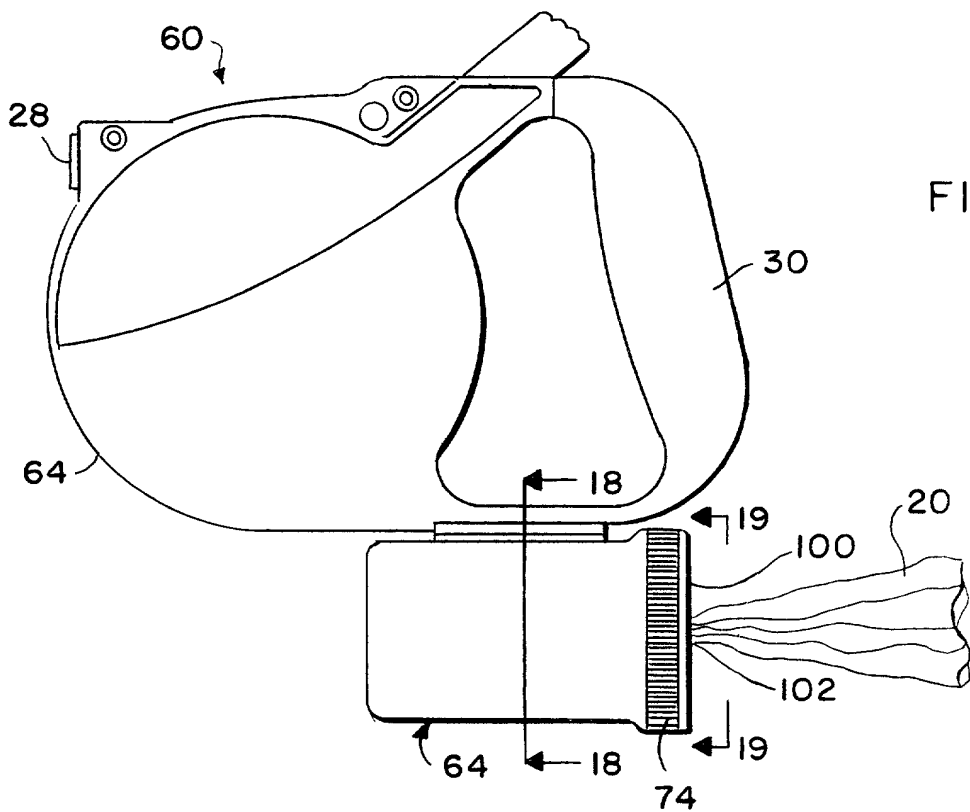


FIG. 17

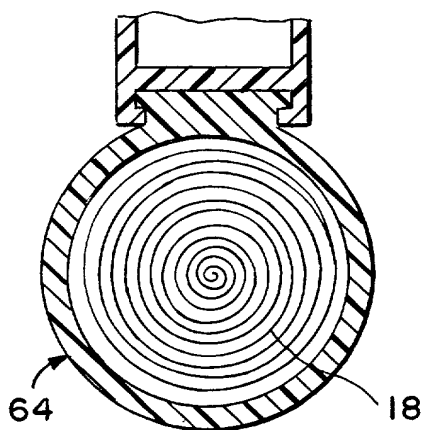


FIG. 18

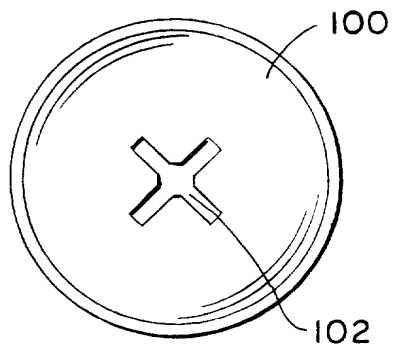


FIG. 19

667060" 50828260

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

As the below named inventors, we hereby declare that:

Our residences, post office addresses and citizenships are as stated below next to our names,

We believe we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled LEASH ASSEMBLY HAVING PET REFUSE BAG DISPENSER MECHANISM the specification of which (check one)

X is attached hereto

___ was filed on _____

Application Serial No. _____

and was amended on (or amended through) _____

(if applicable)

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Sec. 1.56(a).

We hereby claim foreign priority benefits under Title 35, United States Code, Sec. 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) Priority Claimed

NONE

Number Country Date Filed Yes No

We hereby claim the benefit under Title 35, United States Code, Sec. 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Sec. 112, We acknowledge the duty to disclose material information as defined in Title 37 Code of Federal Regulations, Sec. 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>60/100,484</u>	<u>September 16, 1998</u>	<u>Pending</u>
Appln. Serial No.	Filing Date	Status

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

We hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: JOHN E. KELLY, Registration No. 24,269; JOHN D. BAUERSFELD, Registration No. 24,496; STUART O. LOWRY, Registration No. 26,563; SCOTT W. KELLEY, Registration No. 30,762; KAMRAN FATTAHI, Registration No. 35,758 and AARON T. BORROWMAN, Registration No. 42,348.

Address all correspondence to:

Full name of first, joint inventor: Tjmothy Edwards

Date: 8/26/99, 1999

Citizenship: UNITED STATES OF AMERICA

Post Office Address: 2090 Dewberry Court
Westlake Village, California 91361

Full name of second, joint inventor: Mary Edwards

Inventor's signature: Mary Edwards

Date: 8/26, 1999

Residence: Westlake Village, California 91361

Citizenship: UNITED STATES OF AMERICA

Post Office Address: 2090 Dewberry Court
Westlake Village, California 91361